Series **SSN700**

• Lubrication • Potable Water • Chemical Transfer
• Washdown • Corrosive Environments

To handle 1/4" through 1/2" I.D. hose.

- Narrow frame and compact mounting base.
- Non-sparking ratchet assembly.
- Declutching arbor to prevent damage from reverse winding.
- Standard inlet: 90° stainless steel ball bearing swivel joint, 1/2" female NPT threads.
- Standard outlet: 1/2" female NPT threads.
- Standard pressures to 3000 psi (207 bar).
- Standard fluid temperatures from +32° F to +400 °F (0° C to +204° C). Optional temperature ratings available - consult factory.
- Consult factory for other pressures and temperatures.
- 4-way roller assembly.
- Constant tension is available – consult factory.
- 304 stainless steel construction.
- Optional SST Mosmatic ½" balanced pressure swivel joint available, subtract 1.50" from "F" dimension, specify when ordering.

Standard SR configuration shown with optional polished finish

PARTS DRAWING – ISO 171

Model Number	Hose Capacity of Reel feet m			Approx. Weight lb. kg			Std. Roller Assy.	Reel Dimensions*** in. mm							
	I.D. in. mm	1/4 6	3/8 10	1/2 13	NET	UPS/ FedEx SHIP Wt.	Freight SHIP Wt.		A	B	C	E	F	G	H	X
	O.D. in. mm	5/8 16	3/4 19	7/8 22												
SSN716-16-17-10.5J		**–**	**35**	**35**	**66**	**75***	**108**	**N204S**	**10**	**4**	**10.5**	**19**	**12.88**	**17**	**9.12**	**8**
		–	11	11	30	34	49		254	102	267	483	327	432	232	203
SSN716-19-20-10.5J		**–**	**50**	**50**	**67**	**82***	**109**	**N204S**	**10**	**4**	**10.5**	**20.75**	**12.88**	**20**	**10.62**	**8**
		–	15	15	30	37	49		254	102	267	527	327	508	270	203
SSN716-23-24-15.5J		**–**	**65**	**65**	**79**	**92***	**114**	**N204S**	**10**	**4**	**15.5**	**24**	**12.88**	**24**	**12.62**	**8**
		–	20	20	36	42	52		254	102	394	610	327	610	321	203
SSN716-23-24-15.5G		**100**	**75**	**65**	**94**	**101***	**129**	**N204S**	**10**	**4**	**15.5**	**24**	**12.88**	**24**	**12.62**	**8**
		30	23	20	43	46	59		254	102	394	610	327	610	321	203
SSN716-25-26-15.5B		**–**	**75**	**75**	**90**	**–**	**125**	**N204S**	**10**	**4**	**15.5**	**25.5**	**12.88**	**26**	**13.62**	**8**
		–	23	23	41	–	57		254	102	394	648	22.75	660	346	203
†SSN718-25-26-15.5G		**–**	**100**	**100**	**96**	**–**	**131**	**N206S**	**12**	**6**	**15.5**	**25.5**	**14.88**	**26**	**13.62**	**10**
		–	30	30	44	–	59		305	152	394	648	378	660	346	254
SSN718-25-26-15.5 SD		**–**	**100**	**100**	**106**	**–**	**141**	**N206S**	**12**	**6**	**15.5**	**25.5**	**15.5**	**26**	**13.62**	**10**
		–	30	30	48	–	64		305	152	394	648	394	660	346	254

Notes:

1. Specifications subject to change.
2. Reel models and capacities shown are for standard drag applications; for vertical lift applications, consult factory.
3. Other sizes, from standard components, available on request.
4. Finish: Refer to page 2.
5. **Be sure to check dimensions and weights prior to ordering.**

NOTICE: A flexible connector must be used between the inlet pipe and the inlet swivel joint.

* Dimensional weight applies when shipped as a parcel package (via FedEx or UPS Ground).

***X, Y indicate mounting holes. See page 2.

†Capacity based on low pressure air hose only. Not for vertical lift applications.

Available Roller Positions



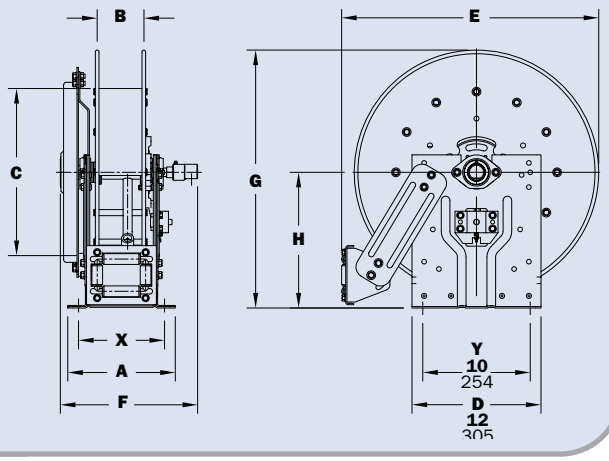

Phone: **518-797-3791** | Toll Free: **1-877-467-3357** | FAX: **518-797-3259** | Email: **reels@hannay.com** | **hannay.com**